
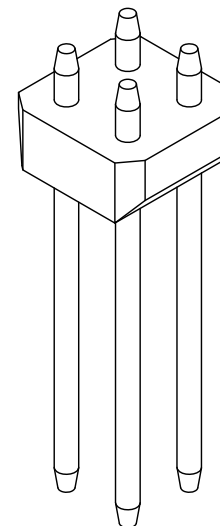
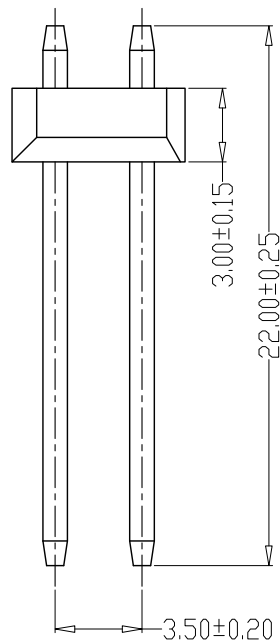


PCB LAYOUT

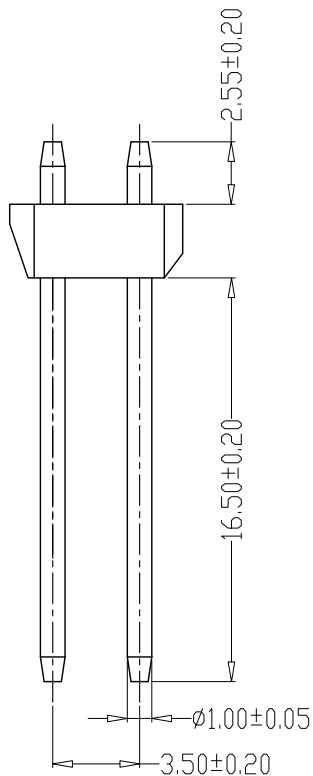

SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer PPA, UL94V-2
PIN Brass Au-plated

GENERL TOLERANCE		制 图 Mapping	张迎春			料 号	D0017-04A	版 本	A
X.±0.25	X.°±2°		2023、07、17			PART NO.		REV.	
.X±0.25	.X°±1°	审 核 Audit	钱岳生			品 名	3.5排针	页 次	1/1
.XX±0.15	.XX°±0.5°		2023、07、17			TITLE	WAFER DIP TYPE	SHEET	
.XXX±0.10	.XXX°±0.5°	核 准 Approved	张 名			客户料号			
			2023、07、18			CUTM. NO.			
乐清市宏一电子有限公司 YueQing HongYiElectronics Co.,Ltd									